AMERICAN JOURNAL OF SMART TECHNOLOGY AND SOLUTIONS (AJSTS)

VOLUME 2 ISSUE 2 (2023)

PUBLISHED BY
E-PALLI PUBLISHERS, DELAWARE, USA

Volume 2 Issue 2, Year 2023
ISSN: 2837-0295 (Online)
DOI: https://doi.org/10.54536/ajsts.v2i2.1455
https://journals.e-palli.com/home/index.php/ajsts

Degefa Woyessa[1*]

August 02, 2023
September 07, 2023
September 26, 2023

Cost of Weeding, Energy Consumption, Field Eficiency, Plant Damage, Performance, WBeat, Weeding Machine, Weeding Efficiency

Weeds constitute a serious problem to wheat crops and cause a great loss to the yield. Manual weeding is labor-intensive and time-consuming. Chemical weed control has a negative impact on both the environment and humans. Today the agricultural sector requires non-chemical weed control that safeguards consumers' demand for high-quality food products and pay special attention to food safety. The objectives of the study was to evaluate the performance of engine operated weeding machine by evaluating the weeding efficiency, plant damage, effective field capacity, field efficiency, fuel consumption, performance index, energy consumption, and cost economics of engine operated weeder in wheat crop. The experimental design was a randomized complete block design and evaluation was conducted at three weeder forward speeds (1.5, 2, and 2.5 km/hr), two depths of operation (from 0 to 20 and from 0 to 40 mm), and three levels of soil moisture content (9.4, 12.34 and 15.25%). The performance of the weeder was found to be optimum at 15.25 percent soil moisture content with 0 to 40 mm depth of operation at a forward speed of 1.5 km/hr. The results revealed that maximum weeding efficiency of 90.1 percent was obtained with lower plant damage of 3.31 percent whereas the effective field capacity, field efficiency, fuel consumption, performance index, and energy consumption were found to be 0.052 ha/hr, 85.99%, 0.41 l/hr, 276.78 ha/hp, and 481.71 MJ/ha, respectively. The analysis revealed that forward speed, depth of operation, and soil moisture had significant effects on weeding efficiency, plant damage, effective field capacity, and fuel consumption at $P<0.05$ level of significance. The cost of weeding per hectare was 758 ETB/ha and 1920 ETB/ha for engine-operated weeders and traditional weeding methods, respectively. Based on the performance results, it can be concluded that the weeding machine is an efficient, effective, and economically viable option with high scope for acceptability among small and medium-scale farmers.

Wheat (*Triticum aestivum* L.) is one of the most important food crops of the world and a part of the family Poaceae that includes major cereal crops of the world such as maize, wheat, and rice. It is the staple food of the diet of several Ethiopians and provides about 15% of the caloric intake of the population of more than 90 million countries (FAO,2015). Wheat is one of the most important crops in Ethiopia, ranking fourth in total cereal production after maize, sorghum, and teff which contribute 10-12% each (Minot *et al.*, 2015). More than 4.7 million households are involved in wheat production each year, producing about 3.9 million tons of wheat on 1.6 million hectares of land, with a mean yield of 2.6 tons/ha (CSA,2013).

After South Africa, Ethiopia is the second-largest wheat producer in Sub-Saharan Africa (FAO,2015). Wheat is mainly grown in the highlands of Ethiopia, with latitudes 6 up to 16° N, longitude 35 to 42°E, at altitudes 1500-2800 meters above sea level, and an average minimum temperature of 60C to 110C (MoA, 2012). In Ethiopia, wheat covered an area of 1,696,082.59 hectares, with average productivity of 2.6 tons/ha during the main cropping season of Meher and a total production of 45,378,523.39 quintals (CSA,2016). According to (CSA,

[1] Oromia Agricultural Research Institute, Asella Agricultural Engineering Research Center, Asella, Ethiopia, P.O. Box 06 Asella, Ethiopia
[*] Corresponding author's e-mail: degefawoyessa20007@gmail.com

effective but it is expensive, labor-intensive as well as time-consuming. In addition, the labor requirement for weeding depends on the weed flora, weed intensity, weeding time, and soil moisture content at the time of weeding.

Nowadays, the use of herbicides is increasing day by day. It is preferred as a quick and effective weed control method without damaging the plants. But, it has adverse effects on human health and the environment. Today, the agricultural sector requires weed control without using chemicals to ensure food safety. Consumers demand high-quality food products and are particularly concerned about food safety. However, mechanical weeder is expected to encourage subsistence farmers leading to increased production and hence reducing poverty (Olukunle and Oguntunde,2006). Mechanical weed control is very effective as it helps to reduce the drudgery involved in manual weeding, kills the weeds and also keeps the soil surface loose ensuring soil aeration and water intake capacity (Hegazy *et al*., 2014). Availability and cost of labour for weed control are limiting its progress, and therefore development of suitable mechanised weeding method is imperative. The cost of weeding by engine operated weeder is about one-third of weeding by manual labours (Tajuddin, 2006). But this method of weed control has received much less scientific attention compared to the other weeding method in Ethiopia. In Ethiopia, weed control is done by manual weeding and chemicals using herbicides. Manual weeding tools are still popular in Ethiopia. Manually operated row crop weeder was developed at Asella Agricultural Engineering Research Center (AAERC) and is being used to control weeds which are more effective and affordable than traditional weeding methods but, labor-intensive and time-consuming (less field capacity), high drudgery and stress on labor (bending all the time to remove weeds). Generally, a few hand weeding is accomplished for cultivating wheat contingent on the type of weeds and their density of invasion. Notwithstanding, these techniques are difficult, less agreeable, tedious, and costly too. Nowadays herbicide usage is increasing. It is preferred as a quick and effective weed control method without damaging the crops. But, it has adverse effects on human health and the environment. It has consequences like cancer disease, environmental air pollution, increased acidity, and salinity of the soil. It can contaminate the soil and the rainwater can carry these chemicals to other areas which will eventually pollute the air we breathe, the food we eat, and the water we drink. A mechanical rotary blade weeder for row-planted cereal crops was developed. But these types of blades also are not efficient in weeding operations. Now mechanical wheat sowing machine is expanding in Ethiopia due to different government programs for mechanization. It is now necessary to develop an engine-operated weeding machine for row sowing wheat crops. The use of a mechanical weeder is reducing drudgery, ensures ease of operation during weeding, and resultantly increases production. Therefore, to assess the possibility of mechanization of the weeding operation, an engine-operated weeding machine was proposed to be designed and developed considering the optimum shape, size, and location of the weeding blade, and performance evaluation was conducted for the end-users. Here comes the relevance of mechanized weeding, which is reducing the time, and cost of weeding operation, and significantly improves weeding efficiency as well as the quality of weeding. Therefore, to increase agricultural production and reduce the time and cost of weeding operations there need to be adopting mechanical weeding. Hence, the study was taken to evaluate the performance of the developed weeding machine based on weeding efficiency, plant damage, effective field capacity, performance index, and energy consumption, and to carry out the cost analysis of the developed weeding machine.

The study site was located 168.7 km away southeast of Addis Ababa, Asella Agricultural Engineering Research Center (AAERC). Fabrication and performance

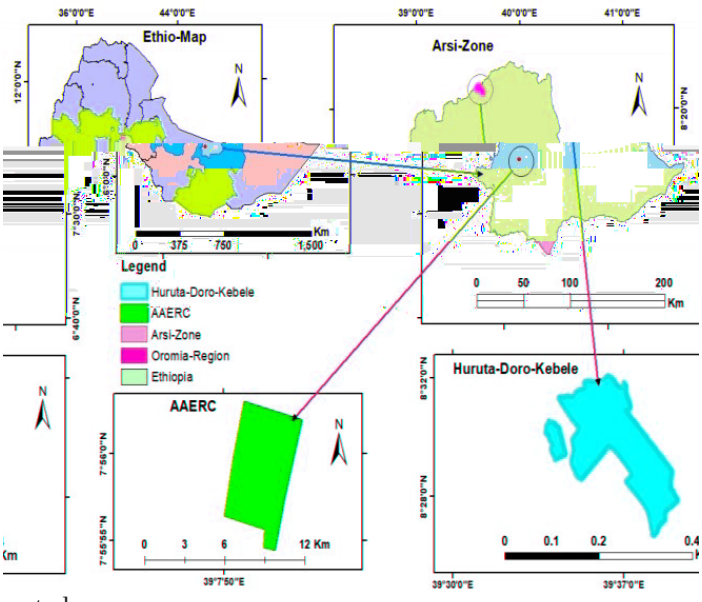

Location of the study area

Performance testing during weeding

Moisture content of the soil was determined using five samples collected randomly from the field. The moisture content of each sample was calculated by using the standard oven-dry method. The weight of the sample with the box was taken and placed in the oven for drying. After 24 hours the oven-dry weight was taken and the moisture content was calculated by using the following formula (Rangapara J., 2014).

$$M \text{ (dry basis)} = (W_w - W_d)/W_d \times 100 \quad (1)$$

Where,

M = Moisture content of soil, %

W_w = Weight of wet soil, gm and

W_d = Weight of oven-dry soil, gm.

The bulk density of a soil indicates the degree of compactness of the soil and is defined as mass per unit volume. Soil samples were collected randomly from treatments of experimental plots with a core sampler. The core sampler was driven vertically deep enough (0 to 15 cm) into the ground to fill the sampler can in the sampler. The weight of each sample was measured and kept in an oven at a constant temperature of 1050C till the soil sample attained constant weight and the weight of the oven-dried sample was taken. The bulk density of each sample was calculated by using the following relationship (Rangapara J., 2014).

$$\varrho_b = M/V \quad (2)$$

Where,

ϱ_b = bulk density of soil, g/cm^3

M = oven dry mass of soil, gm and

V = volume of core sampler, cm^3

The total numbers of plants were counted in an area of one square meter by a quadrate of 1m2 from randomly chosen places in each plot, before and after every weeding operation to observe plant damage percentage.

Any weeding and intercultural operational implement and machine performance are highly influenced by plant growth factors like height, branching pattern, canopy crown diameter, etc. In agricultural production practices, weed removal processes alone or in combination with intercultural operations are taken up at different time intervals. Majority of farmers generally carry a minimum of two such operations up to 50 days after sowing (DAS) in long-duration crops like wheat, barley, etc. However, the actual practice depends on some other factors. Keeping the crop growth factor's importance in mind, the plant height was measured in two uniform plots at 25 and 40 DAS.

Weed population per square meter was recorded randomly from each plot with the help of 1m2 quadrat, after 25 and 40 days after sowing (DAS). All the weeds present in each plot were grouped under grasses and broadleaf weeds.

The machine performance parameters such as weeding efficiency, plant damage, effective field capacity, theoretical field capacity, field efficiency, performance index, energy consumption, and fuel consumption of power weeder were determined for the performance evaluation as follows.

It depends upon the speed and theoretical width of the implement. It is the rate of field coverage that should be obtained if implements perform its function 100% of the time at the rated speed and always cover 100% of its rated width. The theoretical field capacity was calculated as (Kepner *et al.*, 2005).

$$TFC = (W \times S)/10 \quad (3)$$

Where,

TFC = Theoretical Field capacity, ha/h

S = Speed of operation, km/hr and

W = Theoretical width of implement, m

For calculating the effective field capacity, the time taken for actual work and the time used for other activities such as turning, cleaning, adjustment of the machine, and time

PI = Performance index, ha/hp
a = Field capacity of weeder, ha/h
e = Weeding efficiency, %
q= plant damage, %, p = Power input, hp

The field experiment was conducted at selected farmer fields at Jaju district in Arsi Zone of Oromia Regional State. The experiments were conducted in the field with three levels of the forward speed of the weeder (1.5, 2, and 2.5 km/hr), two depths of operation (from 0 to 20 mm and 0 to 40 mm), and three levels of soil moisture content (9.4, 12.34, and 15.25%). Irrigation water was applied by using Parshall flume on the soil to maintain desired soil moisture. The experimental fields were divided into eighteen plots at once and each should have a 20 m by 5 m size. The experiment had three replications of each treatment by using randomized complete block design (RCBD). Relevant observations of each treatment regarding field conditions of each were recorded before and after the weeding operation. The experimental design was laid as (3×2×3) with three replications and had a total of 54 test runs.

Results of the performance of the engine-operated weeder under different treatments were analyzed by analysis of variance (ANOVA) using statistical R-software (version 3.4.3, 2017). Statistical differences in effects of treatment mean were tested at 5% levels of significance and separated using the least significant difference (LSD). The least significant difference (LSD) tests were performed for the mean values of effective field capacity, weeding efficiency, plant damage, field efficiency, fuel consumption, energy consumption, and performance index. The level of significance (P) for these relations was obtained by F-test based on analysis of variance. The mean values and standard deviation (Mean ± Standard deviation) were used to present the results.

The initial cost of engine operated weeder was calculated by adding up the cost of individual components involved in the prototype fabrication at the prevalent market price. The cost of the engine-operated weeder was divided under the two heads known as a fixed cost and variable cost. Estimates of annual and hourly operational costs of the weeder were based on the capital cost of the weeder, interest on capital, cost of repairs and spare parts, labor cost, fuel cost, and depreciation. The operational cost components of the prototype weeder were estimated in Birr (ETB) as follows;

a) Depreciation cost (DP): It was a measure of the amount by which the value of the machine decreases with time. The depreciation cost was calculated as follows:

$$Dp=(CC-SVC)/(EL \times H),(ETB/hr) \quad (13)$$

b) Interest on capital (IC), Interest was calculated on the average investment of the machine taking into consideration the value of the machine in the first and last year. The interest on capital was calculated as follows:

$$IC=((CC+SVC)/2)\times((I\%)/NAOHW),(ETB/hr) \quad (14)$$

c) Shelter, insurance, and tax cost was calculated by 1.5% of the initial cost

Total fixed cost = (a+ b + c)

d) The fuel cost of the weeder was calculated in fuel cost per hour by multiplying by the fuel consumption of the engine-operated weeder (in liters per hour) by fuel cost (in Birr/liters)

e) cost of repairs and spares (Repair and maintenance at 5% of the initial cost)

$$CRS=(CC \times 5\%)/AWHW,(ETB/hr) \quad (15)$$

f) Labor wages: Wage was calculated based on actual wages of workers per hour

$$LW=DLW/DWH,(ETB/hr) \quad (16)$$

Total variable cost = (d + e + f)

The total cost of weeding per hour of the developed power weeder was calculated by summation of total fixed cost per hour with total variable cost per hour.

The total cost of weeding = variable cost of the weeder + fixed cost of the weeder, Finally the cost of operation of the weeder was calculated by the multiplication of the average effective field capacity of the weeder with the total cost of operation of the weeder.

Where:
Dp = Depreciation, ETB/hr
CC = Capital cost, ETB/hr
SVC = Salvage value 10% of initial cost
CRS = Cost of repairs and spares
EL= Estimate life (hr) (assume that estimate life 10 years)
IC = Interest on capital (ETB/hr)
LW = Labor wages
H = Number of working hour per year
I = Interest, %
NAOHW = Number of the annual operating hours of the weeder (ETB/hr)
AWHW = Annual working hours of the weeder
DLW = Daily labor wage

This study was undertaken to evaluate the performance of an engine-operated weeding machine for the wheat crops. The performance evaluation of an engine-operated weeder, the results obtained and their discussions were presented in this section. The performance indicator of the engine-operated weeding machine was expressed in terms of weeding efficiency, plant damage, field efficiency, fuel consumption, performance index, and energy consumption. The costs of operation were calculated and the effects of the machine and operational parameters on soil physical properties are presented. The performance of the prototype machine was evaluated under field conditions and the results obtained were analyzed and discussed under the following sub-headings.

The performance of the prototype was evaluated

and three levels of soil moisture content (9.4, 12.34, and 15.25%). The test procedure was explained in the above section. The effect of operational parameters was studied to evaluate the performance of the weeder in terms of weeding efficiency, plant damage, effective field capacity, field efficiency, fuel consumption, energy consumption, performance index, and cost of the weeder, and also the results were discussed below.

Parameters on Weeding Effciency

The effects of soil moisture and machine operational parameters on weeding efficiency are presented in Figure 4 and Table 7. It is evident that as the depth of operation increased from 0 to 20 and from 0 to 40 mm, the weeding efficiency increased from 73.2 to 78.99% and from 75.74 to 90.1% with 1.5 km/hr weeder forward speed increased soil moisture content from 9.4% to 15.25% respectively. This shows that weeding efficiency decreased with increasing weeder forward speed. Weeding efficiency values decreased from 73.2 to 71.97% and from 75.74 to 74.74% when the weeder forward speed increased from 1.5 to 2 km/hr for two depths of operation from 0 to 20 and 0 to 40 mm respectively.

From Table 7, the minimum value of weeding efficiency was 70.98% and obtained with a 2.5 km/hr weeder forward speed at depth of operation ranging from 0 to 20 mm and soil moisture content of 9.4% whereas the maximum value of weeding efficiency was 90.1% and obtained with a 1.5 km/hr weeder forward speed at depth of operation varied from 0 to 40 mm and 15.25% soil moisture content. These findings are in close agreement with the result reported by Hegazy *et al.*, (2014). Generally, weeding efficiency increased as moisture content increased. The main reason behind it was that when moisture content increases slippage of the ground wheel of the weeder which considerably affects the turning length of the weeder. As a result, weeding efficiency was more in the case of 12.34 and 15.25% soil moisture contents when compared with 9.4% soil moisture content. As the depth of operation increased, the weeding efficiency increased. Similar results were observed for all depths of operation.

The individual and combined effect of operational parameters on weeding efficiency was analyzed statistically and presented in Table 3 and 7. ANOVA revealed that the depth of operation (D) and moisture content (M) had a significant effect on weeding efficiency at ($P<0.05$) level of significance and each variable individually had a significant effect on weeding efficiency whereas the speed of operation had no significant effects on weeding efficiency, but there was a significant difference between lower and higher values at ($p<0.05$). The interaction effect of (S×D), (S×M), and (D×M) are presented in Tables 4, 5(S1210003≥1.1 <005A1‡3.6 <004802sp9 (co003Þde)-12 (ly) 1 (.

	73.57±2.04^{c}	4.92±1.54^{a}	0.056±0.0086^{a}	73.47±3.83^{c}	0.58±0.05^{a}	265.3±33.59^{c}	627.15±63.69^{a}
	77.28±2.72^{b}	4.23±1.16^{b}	0.056±0.0097^{a}	78.21±4.71^{b}	0.52±0.06^{b}	271.7±39.21^{b}	568.65±71.68^{b}
	82.45±5.11^{a}	3.71±0.87^{c}	0.055±0.0088^{a}	84.88±3.28^{a}	0.47±0.07^{c}	292.2±53.26^{a}	503.14± 76.81^{c}
	1.23	0.13	0.003	0.19	0.01	15.80	28.42
	0.43	0.04	0.001	0.09	0.00	5.50	9.89
	75.35± 3.56^{b}	4.19±0.90^{b}	0.057±0.0093^{a}	78.94±6.21^{a}	0.51±0.07^{b}	271.4±41.99^{a}	543.22±69.80^{b}
	80.19±5.23^{a}	4.39±1.61^{a}	0.055±0.0084^{b}	78.76±6.16^{a}	0.53±0.09^{a}	281.4±45.35^{a}	589.40±96.01^{a}
	2.33	5.29	7.31	0.36	2.44	8.44	7.41
	1.00	0.10	0.002	0.16	0.01	12.90	23.21
	0.35	0.03	0.001	0.05	0.00	4.49	8.08

Where, WE = Weeding efficiency, PD = Plant damage, EFC = Effective field capacity, FE =Field efficiency, FC = Fuel consumed, PI =Performance index, EC=Energy consumption, Speed (S_1= 1.5 km/hr, S_2= 2 km/hr, S_3= 2.5 km/hr), Depth (D_1= 0 to 20 mm, D_2= 0 to 40 mm), Soil moisture content (M_1= 9.4%, M_2= 12.34% and M_3= 15.25%), CV = coefficient of variation; LSD = least significance difference, SEM= Standard error of the mean, Values are Mean ± SD. Mean values comparison arranged according to descending order with the same letter in a column are not significantly different at 5% level of significance.

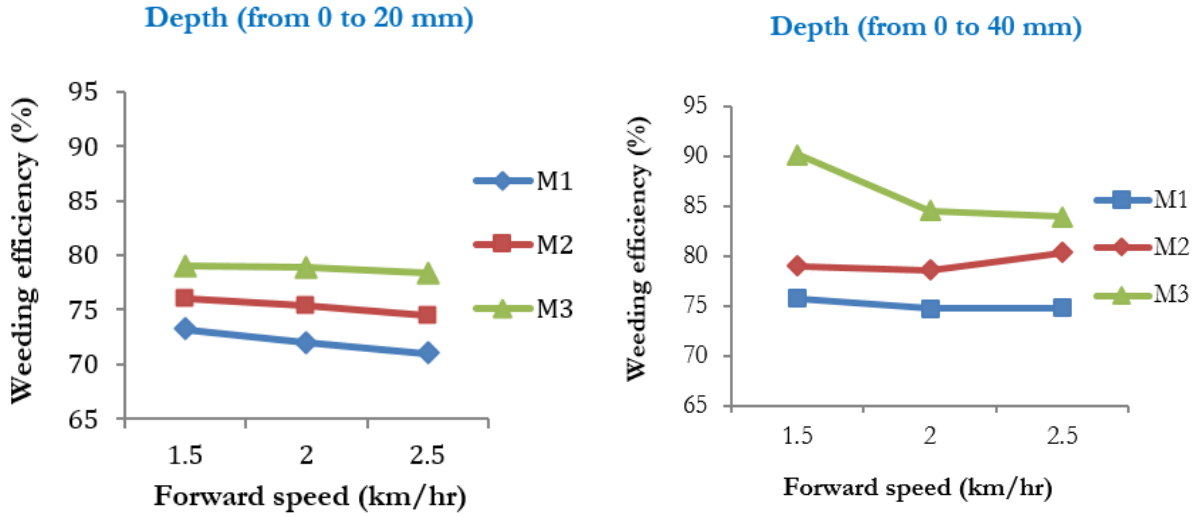

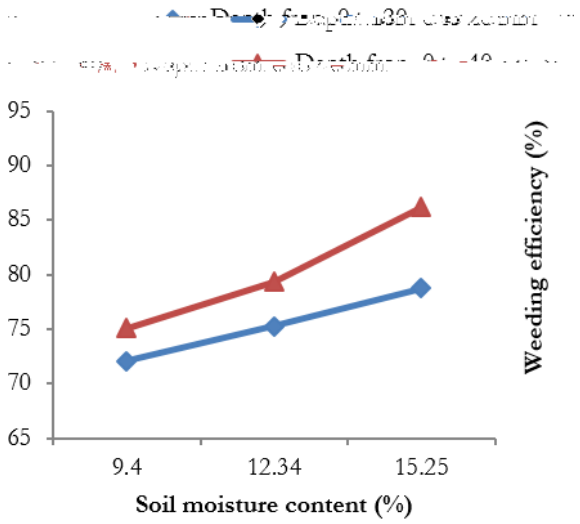

Effect of soil moisture and machine operational parameter weeding efficiency

The effects of depth of operation, forward speed, and soil moisture on plant damage are presented in Figure 5 and Table 7. It was observed that the minimum value of plant damage obtained was 2.78% at 1.5 km/hr weeder forward speed when the soil moisture was 15.25% and the depth of operation varied from 0 to 20 mm. The maximum value of plant damage 7.56% was recorded with 2.5 km/hr at depth of operation ranging from 0 to 40 mm and 9.4% soil moisture. It is evident that as the depth of operation increased, the plant damage percentage increased whereas soil moisture content increased, the plant damage percentage decreased. However, it was observed that as forward speed and depth operation increased, the plant damage percentage increased. This is mainly due to high speed and depth, the movement of the weeder did not remain a straight line but sideward also, resulting in damage to plants. The mean comparison for the main effect of variables on plant damage is

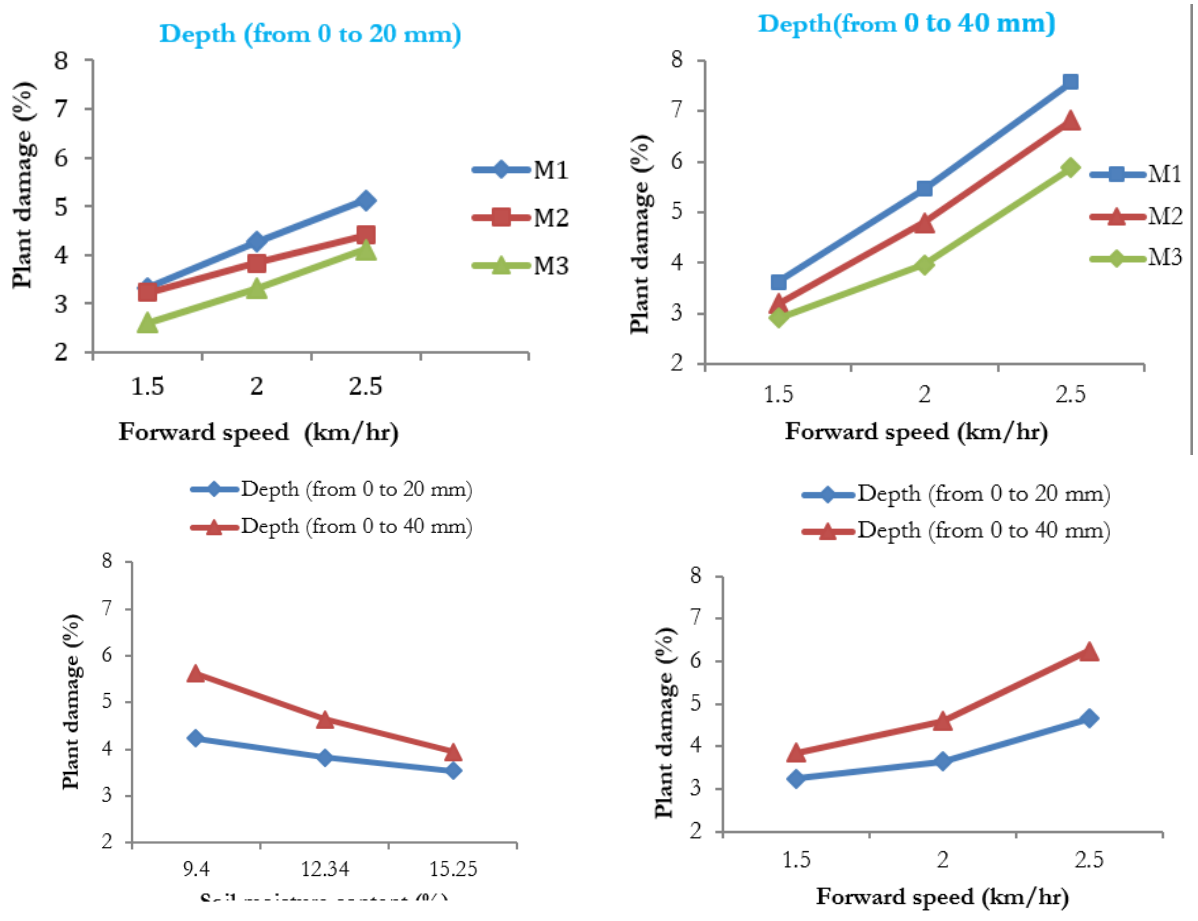

Effect of soil moisture and machine operational parameters on plant damage

summarized in Table 3. From this table, the higher plant damage 5.61% was obtained at 2.5 km/hr forward speed of operation. The same trend occurred for the forward speeds of 1.5 and 2 km/hr which obtained 3.53 and 3.73 percent of plant damage respectively. However, the lowest plant damage was obtained at the forward speed of 1.5 km/hr, and the depth of operation ranged from 0 to 20 mm. The individual effect of operational parameters on plant damage was analyzed statistically and presented in Table 3. ANOVA revealed that forward speeds (S), depth of operation (D), and soil moisture content (M) had significant effects on plant damage at ($p<0.05$) level of significance. Results revealed that there was a significant difference ($P<0.05$) in plant damage at the two depths of operation. The interaction effects of forward speed and depth of operation (S×D), forward speed and soil moisture (S×M), depth of operation, and soil moisture (D×M) on plant damage are presented in Tables 4, 5, and 6 respectively. The results revealed that the interaction effect of variables (S×D) and (S×M), had significant effects on the plant damage at ($P<0.05$) level of significance. The interaction effect (D×M) had no significant influence ($P>0.05$) on plant damage. The results of the combined effect of variables (D×S×M) are presented in Table 7 and revealed that there was no significant effect on the plant damage at ($P>0.05$) level of significance.

Interaction effect of forward speed and depth of operation on performance parameters of weeder

S_1	D_1	76.07 ± 3.15^{c}	3.25 ± 0.19^{e}	0.046 ± 0.001^{c}	84.31 ± 4.64^{a}	0.46 ± 0.06^{e}	225.12 ± 3.56^{c}	592.88 ± 72.14^{a}
	D_2	$81.60\ \pm6.62^{a}$	3.80 ± 0.42^{d}	0.047 ± 0.006^{c}	80.39 ± 5.59^{c}	0.44 ± 0.07^{f}	244.42 ± 34.08^{c}	578.92 ± 128.54^{a}
S_2	D_1	75.39 ± 3.73^{c}	4.49 ± 0.52^{c}	0.057 ± 0.005^{b}	75.76 ± 5.10^{e}	0.51 ± 0.06^{d}	$272.24\ \pm22.12^{b}$	$532.62\pm\ 66.14^{b}$
	D_2	79.29 ± 4.65^{b}	2.97 ± 0.41^{f}	0.058 ± 0.008^{b}	82.05 ± 4.43^{b}	0.55 ± 0.04^{c}	$303.88\ \pm52.59^{a}$	578.25 ± 110.03^{a}
S_3	D_1	74.58 ± 3.99^{c}	4.80 ± 0.87^{b}	0.067 ± 0.002^{a}	76.75 ± 5.36^{d}	0.57 ± 0.04^{b}	$316.92\ \pm22.1^{a}$	504.15 ± 40.44^{b}
	D_2	79.68 ± 4.47^{b}	6.38 ± 1.00^{a}	0.059 ± 0.004^{b}	73.85 ± 5.49^{f}	0.61 ± 0.04^{a}	$295.85\ \pm20.37^{a}$	611.02 ± 23.22^{a}
		2.33	5.29	7.31	0.36	2.44	8.44	7.41
		1.73	0.18	0.004	0.27	0.01	22.35	40.20
		0.60	0.06	0.001	0.09	0.004	7.78	13.99

Where, WE = weeding efficiency, PD = plant damage, EFC= effective field capacity, FE = field efficiency, FC = fuel consumed, PI = performance index, EC= Energy consumption, SEM= Standard error of the mean, CV = coefficient of variation; Speed (S_1= 1.5 km/hr, S_2= 2 km/hr, S_3= 2.5 km/hr), Depth (D_1= 0 to 20 mm, D_2= 0 to 40 mm), values are Mean ± SD, LSD = least significance difference. Means value comparison arranged according to descending order with the same letter in a column are not significantly different at 5% (p>0.05) level of probability

The effective field capacity decreased as the depth of the operation increased, as shown in Figure 6. The effective field capacity increased with the increase in forward speed, due to more area covered in less time. With a 1.5 km/hr weeder forward speed, the effective field capacity decreased from 0.047 to 0.045 ha/hr at 9.4 percent soil moisture content when the depth of operation increased (from 0 to 20 and 0 to 40 mm). The results also revealed that at all levels of soil moisture content, the effective field capacity increased with increasing weeder forward speed, whereas the effective field capacity decreased as the soil moisture level increased in all treatments. This may be due to the frequent sliding of tines under higher moisture conditions. Values of effective field capacity increased from 0.047 to 0.059 and from 0.045 to 0.055 ha/hr when the weeder forward speed increased from 1.5 to 2 km/hr and depths of operation ranged from 0 to 20 and 0 to 40 mm respectively at 9.4% soil moisture content. At the different levels of soil moisture content 9.4, 12.34 and 15.25% the values of effective field capacity were 0.047, 0.046, and 0.046 ha/hr for 1.5 km/hr weeder forward speed at 0 to 20 mm depth of operation.

The maximum value of effective field capacity was 0.068 ha/hr at 2.5 km/hr weeder forward speed at depth of operation ranging from 0 to 20 mm and soil moisture content at 9.4 percent whereas the minimum value of effective field capacity was 0.044 ha/hr and achieved with 1.5 km/hr weeder forward speed at depth of operation varied from 0 to 40 mm and soil moisture content at 12.34 percent. These findings are in close agreement with the result reported by Manian *et al.*, (2004).

The individual and combined effect of operational parameters on effective field capacity was analyzed statistically and presented in Table 3. Analysis of variance revealed that forward speed (S) had a significant influence on the effective field capacity at ($p<0.05$) level of significance while the depth of operation (D) and soil moisture content(M) had no significant influence on the effective field capacity at ($p>0.05$) level of significance.

The interaction effects in forward speed and depth of

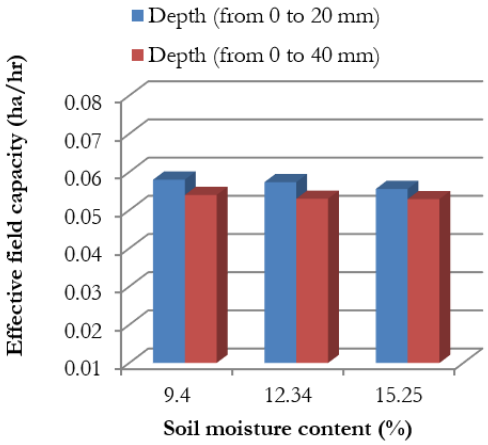

Effect of soil moisture and machine operational parameter on effective field capacity

Interaction effect of forward speed and soil moisture content on performance parameters

	M_1	74.47 ± 1.90^{de}	3.79 ± 0.54^{e}	0.046 ± 0.001^{d}	76.16 ± 3.05^{e}	0.52 ± 0.02^{d}	224.03 ± 4.89^{e}	677.55 ± 50.47^{a}
	M_2	77.49 ± 2.14^{c}	3.53 ± 0.35^{f}	0.045 ± 0.001^{d}	83.14 ± 1.81^{c}	0.44 ± 0.02^{f}	228.19 ± 8.09^{de}	596.45 ± 43.16^{bc}
	M_3	84.54 ± 6.42^{a}	3.25 ± 0.15^{g}	0.049 ± 0.006^{d}	87.74 ± 2.05^{a}	0.38 ± 0.03^{g}	252.07 ± 9.69^{cd}	483.71 ± 88.24^{e}

found to be 73.47±3.83, 78.21±4.71, and 84.88±3.28% respectively whereas the depths of operation varied from 0 to 20 and 0 to 40 mm were obtained 78.94±6.21 and 78.76±6.16%. However, the field efficiency of the weeder increased with an increase in soil moisture content and decreased with an increase in forward speed and operating depth.

Results indicated that the minimum field efficiency of 68.54% was recorded with a 2.5 km/hr weeder operating speed at depth of operation varied from 0 to 40 mm at 9.4% soil moisture. The maximum field efficiency of 89.49% was recorded with a 1.5 km/hr weeder operating speed at depth of operation varied from 0 to 20 mm and soil moisture content of 15.25%. The results revealed that the field efficiency decreased as the forward speeds increased for all soil moisture levels. The major reason for the reduction in field efficiency by increasing forward speed was due to the less theoretical time consumed in comparison with the other test plot. These findings are in close agreement with the result reported by Nkakini *et al.* (2010).The individual and combined effect of operational parameters on the field efficiency were analyzed statistically and presented in Table 3. ANOVA revealed that forward speed (S) and moisture content (M) had significant effects on field efficiency at a 5% ($p<0.05$) level of significance and each variable individually influenced the field efficiency. The significance was observed in the order of speed (S) followed by moisture content (M) and depths of operation (D).

The interaction effects of operating speed and depth of

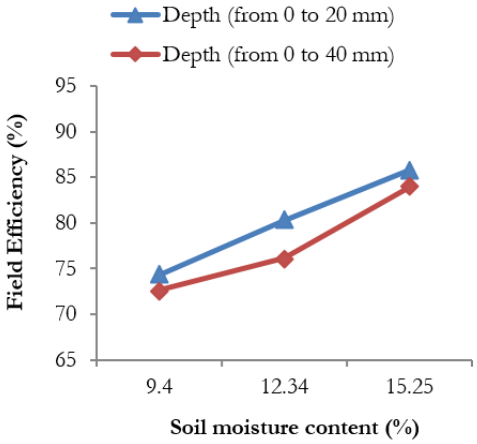

Effect of soil moisture and machine operational parameters on the field efficiency

Interaction effect of soil moisture content and depth of operation on performance parameters

M_1	D_1	72.05 ± 1.58^{d}	4.77 ± 1.17^{b}	0.058 ± 0.01^{a}	73.80 ± 3.96^{e}	0.58 ± 0.04^{a}	265.97 ± 37.29^{b}	601.25 ± 67.55^{b}
	D_2	75.27 ± 1.60^{c}	4.12 ± 0.69^{d}	0.058 ± 0.01^{a}	78.00 ± 5.01^{d}	0.51 ± 0.05^{c}	276.59 ± 45.67^{b}	531.32 ± 66.10^{c}
M_2	D_1	78.72 ± 3.71^{b}	3.70 ± 0.41^{e}	0.055 ± 0.01^{abc}	85.02 ± 3.55^{a}	0.45 ± 0.06^{e}	271.71 ± 46.81^{b}	497.09 ± 23.66^{c}
	D_2	75.09 ± 1.08^{c}	5.08 ± 1.90^{a}	0.054 ± 0.01^{bc}	73.14 ± 3.90^{f}	0.59 ± 0.06^{a}	264.58 ± 31.73^{b}	653.04 ± 50.48^{a}

M_3	D_1	79.30±2.01^{b}	4.35±1.53^{c}	0.053±0.01^{c}	78.41±4.69^{c}	0.53±0.08^{b}	266.86 ±33.59^{b}	605.97±58.42^{b}
	D_2	86.18±3.65^{a}	3.73±1.21^{e}	0.057±0.01^{ab}	84.75±3.18^{b}	0.48±0.08^{d}	312.69 ±53.78^{a}	509.19±109.06^{c}
		2.33	5.29	7.31	0.36	2.44	8.44	7.41
		1.73	0.18	0.004	0.27	0.01	22.35	40. 20
		0.60	0.06	0.001	0.09	0.004	7.78	13.99

Where, WE = weeding efficiency, PD = plant damage, EFC= effective field capacity, FE = field efficiency, FC = fuel consumed, PI = performance index, CV = coefficient of variation, LSD = least significance difference, SEM = standard error of the mean, values are mean ± SD, Depth (D_1= 0 to 20 mm, D_2= 0 to 40 mm),soil moisture content (M_1= 9.4%, M_2= 12.34% and M_3= 15.25%), and Mean values comparison arranged according to descending order with the same letter in a column are not significantly different at 5% level of significance

operation (S×D), forward speed and soil moisture content (S×M), depth of operation, and soil moisture content (D×M) on the field efficiency are presented in Tables 4, 5, and 6 respectively. The results showed that the interaction effect of variables (Depth×Moisture) had significant effects ($p<0.05$) on field efficiency. The interaction effect of variables (Speed×Depth) and (Speed×Moisture) had significant effects ($p<0.05$) on field efficiency. The results of the combined effect of variables (Speed× Depth×Moisture) are presented in Table 7 and revealed that the combined effect of depth of operation, forward speed, and soil moisture content had significant effects on field efficiency at ($p<0.05$) level of significance.

Effects of forward speed, depth of operation, and soil moisture on fuel consumption of the engine-operated weeder are presented in figure 8 and Table 7. The figure revealed that fuel consumption for depth of operation from 0 to 20 mm and 0 to 40 mm with a forward speed of 1.5 km/hr was varied in the range of 0.53 to 0.39 l/hr and 0.51 to 0.41 l/hr when the soil moisture content increased from 9.4 to 15.25% respectively. The fuel consumption for depth of operation from 0 to 20 mm and 0 to 40 mm with a forward speed of 2 km/hr was varied in the range of 0.57 to 0.44 l/hr and 0.60 to 0.50 l/hr when the soil moisture content was varied from 9.4 to 15.25% respectively.

The fuel consumption for depth of operation varied from 0 to 20 mm and 0 to 40 mm with a forward speed of 2.5 km/hr varied in the range of 0.62 to 0.52 l/hr and 0.65 to 0.57 l/hr, respectively. It is evident that fuel consumption increased as forward speed and depth of operation increased from 1.5 to 2.5 km/hr and from 0 to 20 and 0 to 40 mm respectively.

The means comparison for fuel consumption in all treatments is shown in Table 7. Results indicated that the minimum value of fuel consumption 0.39 l/hr was recorded at 1.5 km/hr weeder forward speed, depth of operation varied from 0 to 20 mm, and soil moisture content 15.25%. While the maximum value of fuel consumption 0.65 l/hr was recorded at 2.5 km/hr weeder forward speed, depth of operation of 0 to 40 mm, and soil moisture content of 9.4 percent. Hence, maximum fuel consumption was obtained at a maximum forward speed and depth of operation. Similar results were reported by Manuwa *et al*., (2009).

The main effect of operational parameters on fuel consumption was analyzed statistically and presented in Table 3. Analysis of variance revealed that the influence in forward speed, depths of operation, and moisture content had a significant influence on fuel consumption at ($p<0.05$) level of significance. Each variable significantly affects the fuel consumption in the order of speed (S) followed by depths of operation (D). The interactive effect of variables, forward speed and depth of operation (S×D), forward speed and soil moisture content (S×M), depth of operation and soil moisture content (D×M) on fuel consumption are presented in Tables 4, 5, and 6 respectively. The results showed that the interaction effect in forward speed and depth of operation(S×D) had significant effects ($p<0.05$) whereas the interaction effect (Depth×Moisture) and (Speed×Moisture) had no significant effects ($p>0.05$) on fuel consumption. Table 7 shows the results of the combined effect of variables (Speed× Depth×Moisture). It revealed that the combined effect of depth of operation, forward speed, and soil moisture was not significant effects on fuel consumption at a 5% ($p>0.05$) level of significance.

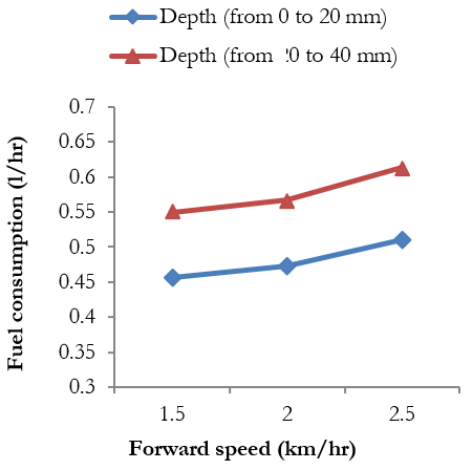

Effect of soil moisture and machine operation parameter on fuel consumption

Combined effect of forward speed, depth of operation and soil moisture content on performance of the weeder

		M_1	73.20 ± 1.52^{ghi}	3.32 ± 0.37^{ij}	0.047 ± 0.001^{hij}	78.89 ± 0.82^{g}	0.53 ± 0.01^{efg}	221.63 ± 4.22^{e}	671.50 ± 35.03^{ab}
		M_2	76.01 ± 1.76^{efg}	3.00 ± 0.38^{jk}	0.046 ± 0.001^{hij}	84.54 ± 0.88^{cd}	0.45 ± 0.00^{h}	226.36 ± 2.06^{e}	591.88 ± 18.19^{abcde}
		M_3	78.99 ± 3.03^{de}	2.78 ± 0.55^{k}	0.046 ± 0.001^{hij}	89.49 ± 0.67^{a}	0.39 ± 0.02^{i}	227.36 ± 0.68^{e}	515.28 ± 30.89^{efgh}
		M_1	75.74 ± 1.36^{efgh}	4.27 ± 0.12^{fg}	0.045 ± 0.002^{ij}	73.43 ± 0.57^{hi}	0.51 ± 0.03^{g}	226.43 ± 4.96^{e}	622.66 ± 15.75^{abc}
		M_2	78.98 ± 1.35^{de}	3.83 ± 0.10^{h}	0.044 ± 0.002^{i}	81.73 ± 1.22^{f}	0.43 ± 0.03^{h}	230.04 ± 12.21^{de}	601.03 ± 65.29^{abcde}
		M_3	90.1 ± 1.17^{a}	3.31 ± 0.09^{ij}	0.052 ± 0.008^{ghi}	85.99 ± 0.96^{bc}	0.41 ± 0.02^{i}	276.78 ± 45.90^{c}	481.71 ± 12.34^{gh}

		M_1	74.81±0.51^{fgh}	7.56±0.26^{a}	0.062±0.00^{bcde}	68.54±0.95^{k}	0.65±0.02^{a}	292.22±0.57^{bc}	683.60±70.95^{a}
		M_2	78.33-±4.04^{de}	3.96±0.18^{gh}	0.065±0.002^{abcd}	83.58±1.08^{de}	0.52±0.01^{fg}	320.32 ±33.32^{b}	452.15±24.59^{h}
		M_3	74.44±1.80^{ghi}	4.71±0.13^{e}	0.067±0.001^{ab}	74.84±1.22^{h}	0.56±0.02^{de}	328.63 ±11.25^{b}	479.91±38.53^{gh}
		M_1	70.97±1.93^{i}	5.86±0.51^{c}	0.068±0.003^{a}	71.84±1.03^{ij}	0.62±0.01^{ab}	301.79 ±12.30^{bc}	550.83±0.54^{cdefg}
		M_3	84.53±3.46^{b}	3.11±0.05^{ijk}	0.066±0.008^{abc}	87.49±0.75^{b}	0.50±0.00^{g}	366.69 ±34.58^{a}	460.47±75.96^{gh}
		M_2	78.60±0.51^{de}	3.15±0.02^{ijk}	0.053±0.006^{fgh}	81.23±0.60^{f}	0.54±0.01^{def}	269.84 ±21.48^{c}	621.42±92.61^{abc}
		M_1	74.74±1.27^{fghi}	3.42±0.27^{i}	0.055±0.005^{efg}	77.43±0.45^{g}	0.60±0.02^{bc}	275.09 ±22.53^{c}	652.86±46.13^{ab}
		M_3	78.85±4.24^{de}	3.94±0.11^{gh}	0.055±0.005^{efg}	81.98±1.40^{ef}	0.44±0.03^{h}	267.43±33.64^{cd}	494.28±16.40^{fgh}
		M_2	75.36±1.43^{efgh}	4.41±0.08^{ef}	0.058±0.005^{defg}	74.63±1.35^{h}	0.50±0.02^{g}	274.79 ±19.04^{c}	522.16±77.91^{defgh}
		M_1	71.97±0.34^{hi}	5.12±0.11^{d}	0.059±0.006^{cdef}	70.67±1.29^{j}	0.57±0.01^{cd}	274.49 ±20.24^{c}	581.42±72.24^{bcdef}

varied from 0 to 40 mm at 9.4% and 15.25% soil moisture content respectively. Energy consumption at the initial stages of the plant was less because of obstruction-free travel between the rows. Whereas in the case of a fully grown field, it was difficult to travel between the rows, and as a result, energy consumption is higher.

The mean comparison for energy consumption in all treatments is shown in Table 7. A result indicated that the minimum energy consumption of 452.2 MJ/ha was obtained by using a 2.5 km/hr weeder forward speed at depth of operation varied from 0 to 40 mm and soil moisture content 15.25%. The maximum value of energy consumption of 683.6 MJ/ha was obtained by using a 1.5 km/hr weeder forward speed at depth of operation varied from 0 to 40 mm and soil moisture content 9.4%. The results trend obtained and represented on Figure 10 revealed that as forward speed and moisture content increased, energy consumption decreased. As the depth of operation increased, energy consumption for the machine increased. Therefore, depth of operation and energy consumption is a positive relationship.

The main and combined effects of operational parameters on energy consumption were analyzed statistically and presented in Table 3. Analysis of Variance (ANOVA) revealed from the tables that the effect of forward speed (S) had no significant effects on energy consumption at ($P>0.05$) level of significance. But there was a significantly different between higher and lower values of forwarding speed. From the ANOVA table, depths of operation (D) and moisture content (M) had a significant influence on energy consumption at($P<0.05$) level of significance and each variable individually influenced the energy consumption and also significance was observed in the order of speed (S) followed depths of operation (D).

The interaction effects of forward speed and depth of operation (S×D), forward speed and soil moisture content (S×M), depth of operation, and soil moisture content (D×M) on energy consumption are presented in Tables 4, 5, and 6 respectively.

The results observed from the data revealed that the interaction effect of variables (Speed×Depth) and (Speed×Moisture) had significant effects on energy consumption at ($P<0.05$) level of significance. The interaction effect of variables (Depth×Moisture) had no significant influence ($P>0.05$) on energy consumption. The results of the combined effect of variables (Speed×Depth×Moisture) are presented in Table 7. Results revealed that the combined effect of depth of operation, forward speed, and soil moisture content had

n 5 nt %0.0. on e4 y conu4 nc

moisture content and decreased with increasing weeder forward speed. It was optimum at 12.34 and 15.25 percent soil moisture as it gave a reasonably higher working range. Plant damage is low when operated at lower speeds, but high plant damage occurs when operated at high rates.

The maximum value of plant damage 7.56% was obtained with 2.5 km/hr at depth of operation ranging from 0 to 40 mm and 9.4 percent soil moisture content.

The maximum effective field capacity of 0.068 ha/hr was obtained at 2.5 km/hr weeder forward speed, a depth of operation ranging up to 20 mm, and soil moisture content of 15.25 percent. As the depth of operation increased, the effective field capacity decreased. The effective field capacity increased with the increasing forward speed, as a result of more area being covered in less time.

The field efficiency of the engine-operated weeder is higher when operated at low forward speed and low depth of operation within high soil moisture content.

Fuel consumption increased as the forward speed and depth of operation increased and decreased as moisture content increased.

In conclusion, the performance of the weeder was found to be optimum at 15.25 percent moisture content with 0 to 40 mm depth of operation at a forward speed of 1.5 km/hr.

Hence, maximum weeding efficiency of 90.1 percent was recorded with lower plant damage of 3.31 percent while the effective field capacity, field efficiency, fuel consumption, performance index, and energy consumption were found to be 0.052 ha/hr, 85.99%, 0.41 l/hr, 276.78 ha/hp, and 481.71 MJ/ha, respectively.

The costs of weeding per hectare were observed as 758 birr/ha and 1920 birr/ha for engine-operated weeder and traditional weeding methods, respectively.

Based on the findings, it is concluded that the performance of the engine-operated weeder can be an efficient, effective, and economically possible option with the high prospect of extending technology for small and medium-scale farmers. However, this plenty of scope for improvement on the machine.

The prototype weeder performance evaluation revealed that it can be used successfully on the farm for weeding operations. To make the weeder applicable and acceptable among farmers, the following steps are recommended for further study and improvement on the machine:

- The machine should be tested on different soil types,
- Different types of weeding blades should be designed and tested,
- Adaptation, modification, and performance test of the machine for multi-crops weeding operation should be done and
- Demonstration and scaling up of this machine should be undertaken at the farm level.

Alizadeh, M. R., (2011). Field performance evaluation of mechanical weeders in the paddy field. *Scientific Research and Essays, 6*(25), 5427-5434.

Biswas, H.S. and Yadav, R.,(2004). Animal drawn weeding tools for weeding and intercultural in black soil. *Agricultural Engineering Today, 28*(1), 47–53

CSA(Central Statistical Agency), (2013). Report on area and production of major crops meher season. Report on Area and Production of Major Crops Meher Season. Addis Ababa.

CSA(Central Statistical Agency), (2015). Report on area and production of major crops, private peasant holdings, and meher season. Statistical Bulletin 278. Addis Ababa, Ethiopia.

CSA (Central Statistical Agency), (2016). Report on area and production of major crops, private peasant holdings, meher season, Addis Ababa, Ethiopia.

FAO(Food and Agriculture Organization)., (2015). Agricultural Production Statistics. FAOSTAT. Rome.

Gavali, M. and Kulkarni, S.,(2014). Comparative Analysis of Portable Weeder and Powers Tillers in the Indian Market. *International Journal of Innovative Research in Science, Engineering and Technology, 3*(4), 11004-11013.

Hegazy, R. A., Abdelmotaleb, I. A., Imara, Z. M. and Okasha, M. H.,(2014). Development and evaluation of small-scale power weeder. *Misr J. Ag. Eng, 31*(3), 703-728.

Karale, D. S., Khambalkar, V. P., Bhende, S. M. and Wankhede, P. S., (2008). Energy economic of small farming crop production operations. *World J. of Agric. Sciences, 4*(4), 476-482.

Kankal, U., Now, R. and Palled, V. K., (2014). Optimization of operational parameters and performance evaluation of self-propelled weeder for field crops. *International Journal of Applied Agricultural & Horticultural Sciences, 5*(1), 56–60.

Kebede Desta., (2000). Weed control methods used in Ethiopia. Animal power for weed control. Technical Centre for Agricultural and Rural Cooperation (CTA), Wageningen, The Netherlands.

Kepner, R. A., Bainer, R., and Barger, E. L., (2005). *Principle of Farm Machinery.* 3rd Edition. New Delhi: CBS Publishers & Distributors Pvt. Ltd.

Lopez-Granados.F.,(2011). Weed detection for site-specific weed management, mapping, and real-time approaches. *Weed Research, 51*, 1–11.

Manuwa, S. I., Odubanjo, O. O., Malumi, B. O. and Olofinkua, S. G.,(2009). Development and performance evaluation of a row-crop mechanical weeder. *Journal of Engineering and Applied Sciences, 4*(4), 236-239.

Minot, N., Warner, J., Lemma, S., Kasa, L., Gashaw, A. and Rashid, S., (2019). The wheat supply chain in Ethiopia:Patterns,Trends,and Policy Options. *Gates Open Res, 3*(174), 174.

MOA(Ministry of Agriculture), (2012). Animal and Plant Health Regulatory Directorate. Crop variety register, Issue No. 15. Addis Ababa, Ethiopia.

Mohammad, A., Baghestani, M. A., Soufizadeh, S. and

Bagherani, N., (2007). Weed control and wheat (*Triticum aestivum* L.) yield under application of 2, 4-D plus carfentrazoneethyl and florasulam plus flumetsulam. *Crop Protection, 26*(12), 1759-1764.

Monalisha, S. and Goel, A. k., (2017). Development of a Multipurpose Power Weeder. *The International Journal of Social Sciences and Humanities Invention, 4*(6), 3527–3531.

Nkakini, S. O., Akor, A. J, and Ayotamuno, J.,(2009). Design and Fabrication of engine-powered roto-weeder. *Journal of Agricultural Engineering and Technology(JAET), 17*(1), 7–16

Nkakini, S. O., Akor, A. J., Ayotamuno, J., Ikoromari, A. and Efenudu, E. O., (2010). Field performance evaluation of manual operated petrol engine powered weeder for the tropics. *Agricultural Mechanization in Asia, Africa & Latin America, 41*(4), 68-73

Olukunle, J., and Oguntunde, P. G., (2006). Design of a row crop weeder. Conference on International Agricultural Research for Development.Tropentag 2006 University of Bonn.

Padole., (2007). Performance Evaluation of Rotary PowerWeeder. *Agricultural Engineering Today, 31*(3and4), 30-33.

Rangapara Dineshkumar, J., (2014). Development of mini tractor operated picking type pneumatic plante. r Anand agricultural university.

Shehzad, M. A., Nadeem, M. A. and Iqbal, M., (2012). Weed control and yield attributes against post-emergence herbicides application in wheat crop, Punjab, Pakistan. *Global Advanced Research Journal of Agricultural Science, 1*(1), 7-16.

Tajuddin, A., (2006). Design, development, and testing of engine-operated weeder. *Agricultural Engineering Today, 30*(5), 25–29.

Varshney, R. A., Tiwari, P. S., Narang, S. and Mehta, C., (2005). Databook for agricultural machinery design. Book no. CIAE, 2004/1, CIAE, Bhopal (M.P.) India.

Verma, A. and Victor, V. M., (2003). Design and development of power-operated rotary weeder for wetland paddy. *Agricultural Mechanization in Asia and Latin America, 34*(4), 27–29.

Yadav, R. and Pund. S., (2007). Development and ergonomic evaluation of manual weeder. Agricultural Engineering International: The *CIGRE Journal. Manuscript PM 07 022*, IX.